


# Vuelta pendant lamp

---

Assembly manual

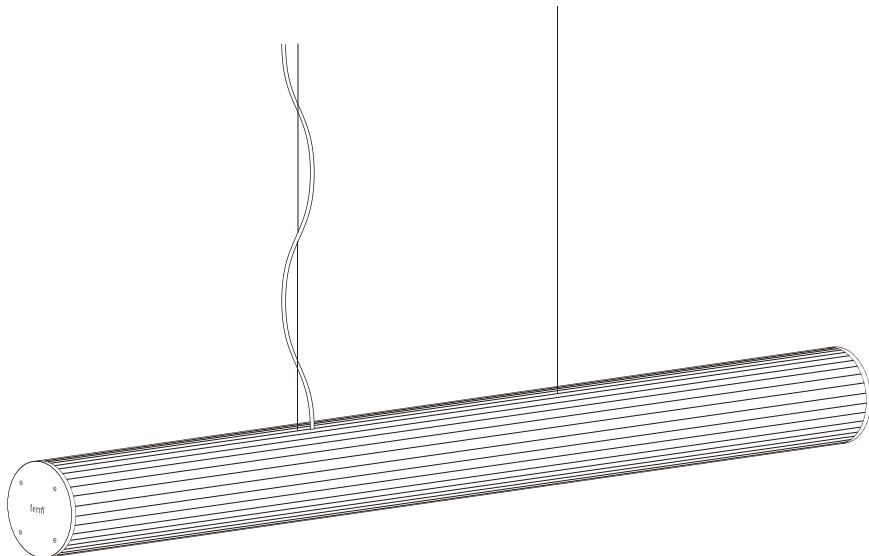

ferm  
LIVING



# General Instructions

## PLEASE READ BEFORE INSTALLATION

### **WARNING:**

The safety of this fitting can only be guaranteed if the following instructions are observed during both installation and use. Please retain these instructions safely after installation.

### **PLEASE OBSERVE THE FOLLOWING GUIDELINES:**

Ensure that the power supply has been switched off prior to installation or removal of the product. Never undertake an electrical installation without the proper know ledge or training. If not familiar with electrical wiring, contact a qualified electrician.

The product may in no way be modified or tampered with. Any modification may compromise safety and make the product itself dangerous to use. FERM LIVING does not accept any responsibility for products that have been modified.

The light source in this product cannont be replaced..

This product is meant for indoor use only.

This appliance should not be disposed in a domestic trash receptacle and should instead be recycled appropriately.

### **CLEANING INSTRUCTIONS:**

Use only a soft cloth to clean the product. Dampen the cloth with water and soap or a mild cleanser if needed.

### **MORE INFORMATION:**


To access further information such as product overview and material descriptions, please visit our website at [www.fermliving.com](http://www.fermliving.com). If you have any questions or comments, please do not hesitate to contact us at [info@fermliving.com](mailto:info@fermliving.com).

# Technical Specifications

## VUELTA PENDANT 100

Rated Power:	30w
Lumen output at maximum:	3000lm
CCT:	3000k
CRI:	>90
Rated Voltage:	120V AC
Frequency:	60Hz
Certification:	ETL
Standard:	Dali implementation following EN62386-102 standard
Dimension:	1004x84x84mm
Cable lenght:	6m
Electrical wire lenght:	5m

## BOX CONTENT

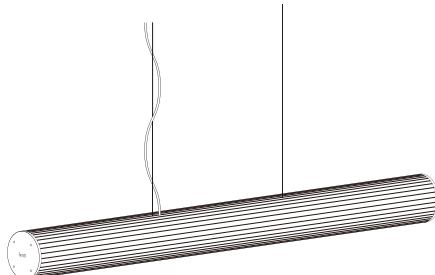

1x  
Lamp  
(100cm or 60cm)



x1  
Remote control



2 x Machine screw



1 x Base bracket



1x  
Glove



2x  
Cable holder



2x  
Raw plugs Ø8mm  
*(not suitable for drywalls)*




2x  
Screws



1x  
Canopy

## NEEDED TOOLS



Electrical drill



Pencil



Ruler



Spirit level




Philips head screwdriver




Cable cutter

## ASSEMBLY PROCESS

1

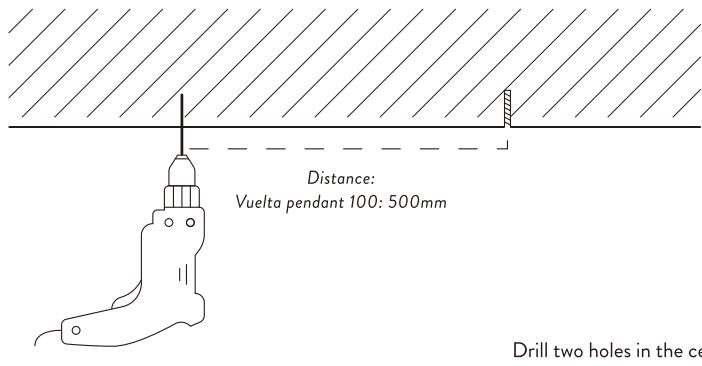


2

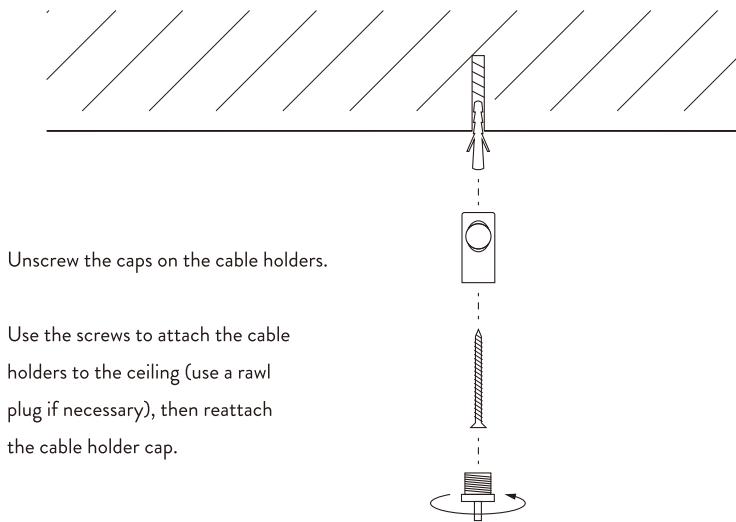


## ASSEMBLY PROCESS

**3**

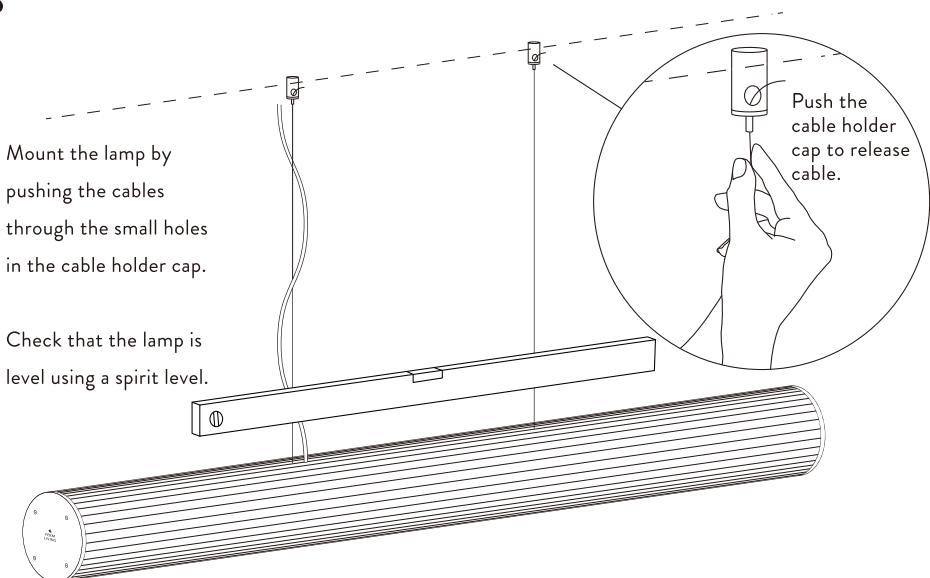

**4**

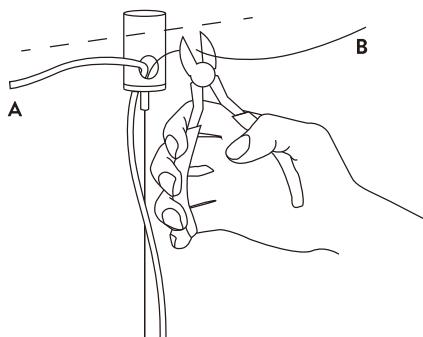


**A.** Route the electrical wire through the large holes in the cable holders.

**B.** Cut the cable to the desired length.  
*NOTE: Cables cannot be replaced, so only cut when you are sure you have achieved desired length.*


## ASSEMBLY PROCESS

5

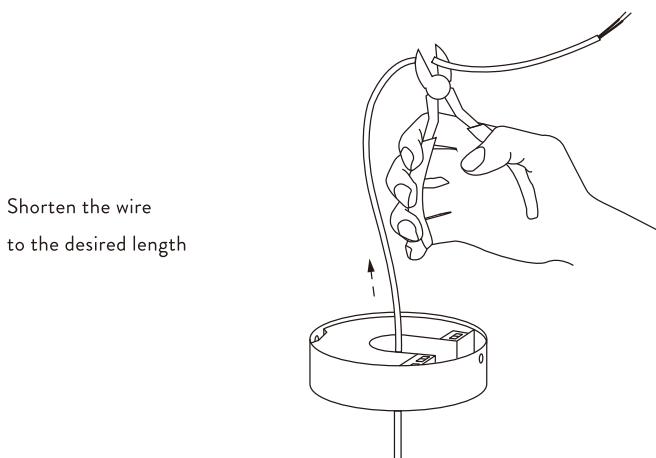

6

## CONOPY INSTALLATION

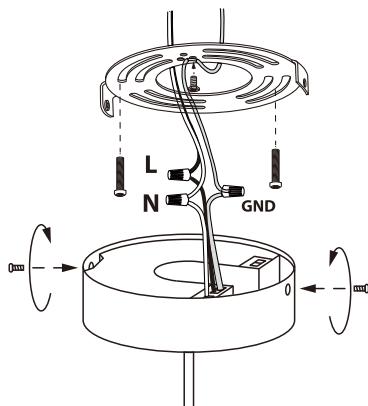


Mount the ceiling bracket to the junction box with 2 existing screws.  
Or drill two holes where the lamp is to be placed. (Use an electrical drill)  
Set up the ceiling bracket with appropriate screws and two wallplugs.

## ELECTRICAL INSTALLATION

Turn your power off during installation

### 7 Option A

NO DALI CONNECTION

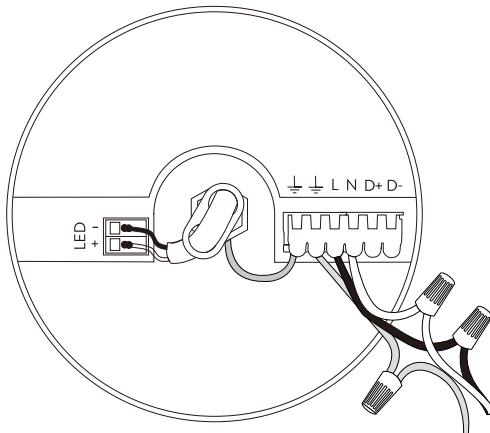

Connect the wires as shown here.


**N:** Blue wire

**L:** Brown wire

**Ground icon:** Green-yellow wire

### 7 Option B

DALI CONNECTION

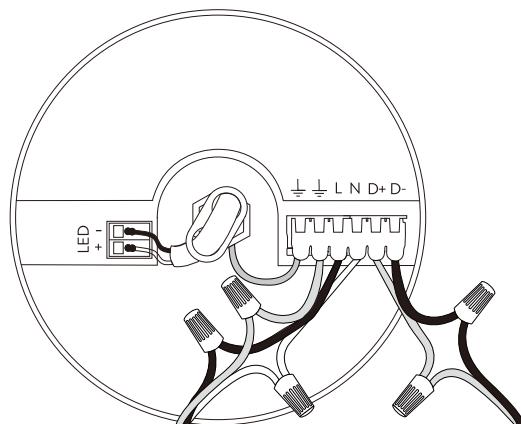

Connect the wires as shown here.

**Dali+:** Red wire

**Dali-:** Black wire

**Ground icon:** Green-yellow wire

## HOW TO USE THE REMOTE CONTROL


### 8

**On/Off.** Turns lamp on at saved brightness level / brightness level will be saved when turning off lamp

**⊕ Increase light intensity**

**⊖ Decrease light intensity**


**Please note:** If you use the wall switch to turn the lamp on and off, the lamp will return to the last saved brightness level. If the pendant is connected to a Dali bus, the remote is automatically deactivated.

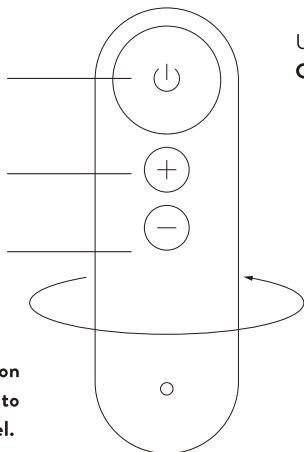

Before using the remote, please remove the battery from the control unit and remove the protective cardboard disc that is placed under the battery.

Use a coin to replace battery.

**CR2025 3V**

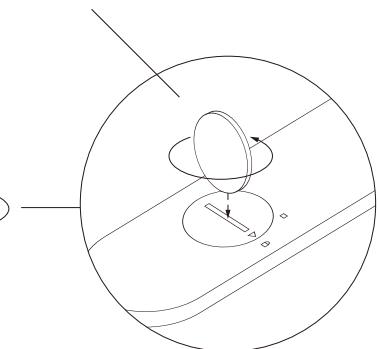


## REMOTE CONTROL PAIRING

This pairing operation is not required unless you want to control multiple lamps (max 3 lamps) with the same remote control, or you need to reset your remote.

### How to Pair:

1. Turn off the lamps power at its electrical power supply.
2. Turn it on again. In the first 10 seconds, push the following sequence of buttons: on/off, +, -. Once the pairing has been done successfully, the lamp will flicker 1 time.

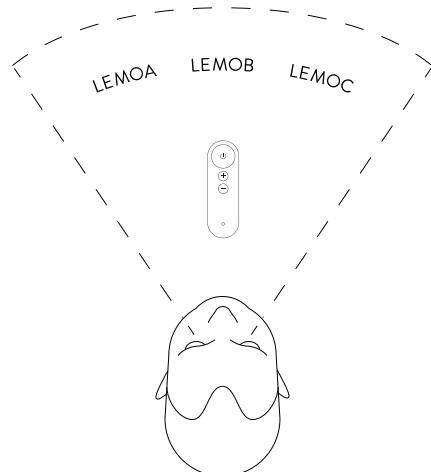



fermliving.com